


# How to apply a Ninja Plus Tag with a Foam Backing

Figure 1



If the lock is closed as shown above please open it (see Fig 2).

Figure 2

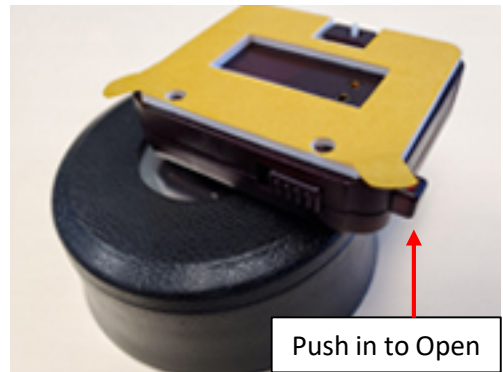

Place the tag on the detacher and push in the tab to open/disarm.

Figure 3



The tag is opened/disarmed and ready to be closed/armed.

Figure 4



Place the foam backing on the tag and press down firmly.

Figure 5



Peel off the paper to expose the foam's sticky side.

Figure 6



Place the tag on the package, then slide the switch to arm. A beep will sound to indicate the tag is armed and protecting the package.